


MIN ZOOM

Beam opening

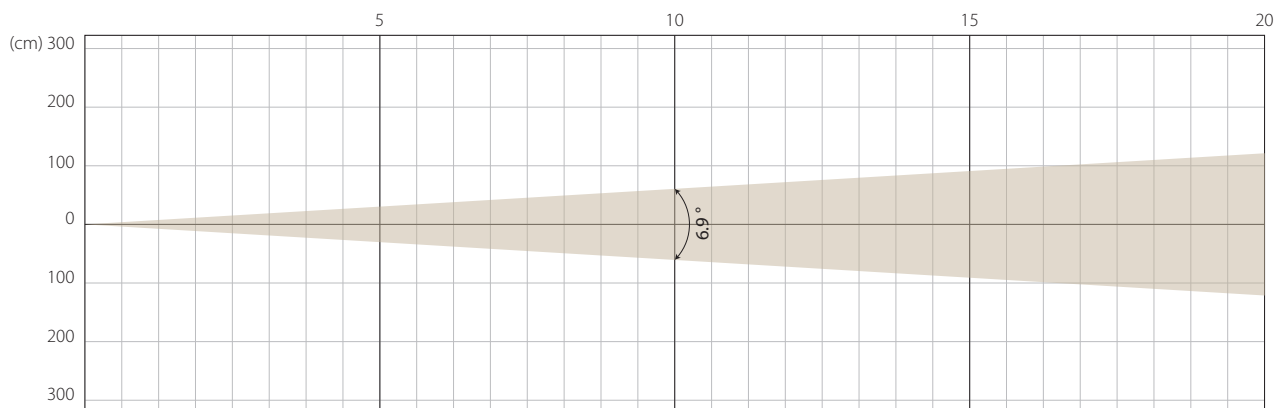


Intensity

| Distance (m) | 5 | | 10 | | 15 | | 20 | |
|--------------|-------|----------|------|----------|------|----------|------|----------|
| unit | lux | diameter | lux | diameter | lux | diameter | lux | diameter |
| White | 34940 | 0,61 | 8543 | 1,26 | 3865 | 1,89 | 2139 | 2,52 |

MIDDLE ZOOM

Beam opening

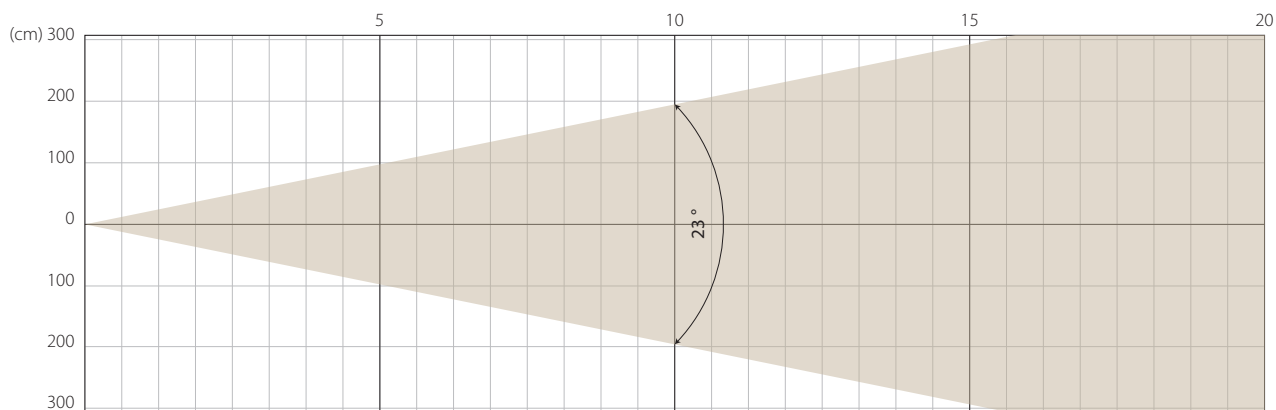


Intensity

| Distance (m) | 5 | | 10 | | 15 | | 20 | |
|--------------|------|----------|------|----------|-----|----------|-----|----------|
| unit | lux | diameter | lux | diameter | lux | diameter | lux | diameter |
| White | 4573 | 2,02 | 1065 | 3,9 | 539 | 5,98 | 310 | 7,9 |

MAX ZOOM

Beam opening

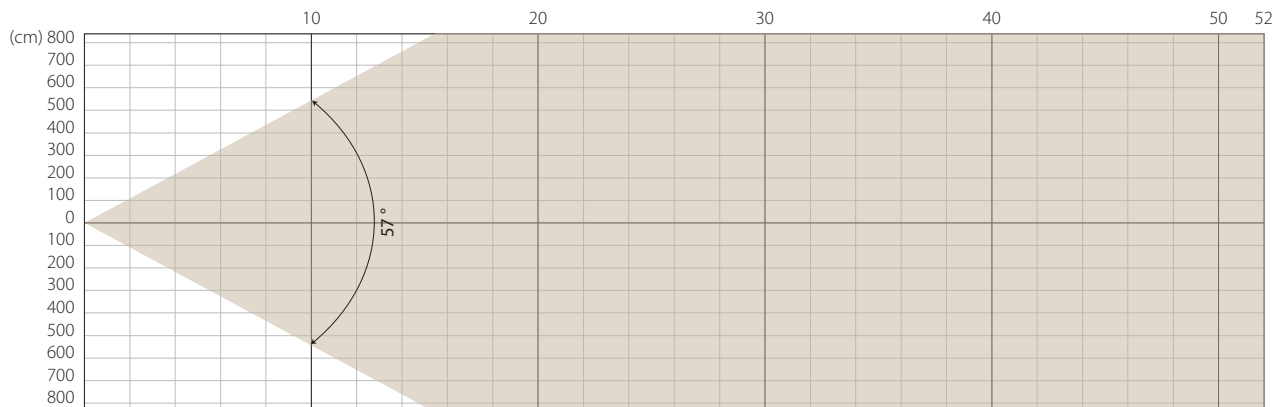

Intensity

| Distance (m) | 5 | | 10 | | 15 | | 20 | |
|--------------|-----|----------|-----|----------|-----|----------|-----|----------|
| unit | lux | diameter | lux | diameter | lux | diameter | lux | diameter |
| White | 728 | 5,43 | 235 | 10,86 | 118 | 16,29 | 70 | 21,72 |



| | |
|-------------------|---------------------|
| Total Flux | 14285 lm (@zoom 90) |
|-------------------|---------------------|

| | |
|-----------------------|--------------|
| CCT @LED engin | 7000 (±450K) |
| CCT @open | 6092 (±450K) |
| Ra @open | 90 (±2) |
| TLCI | 90 |
| TM-30 | TBA |

| Fan Mode | Noise Level (dBA) | Flux (lm) |
|---------------------|--------------------------|------------------|
| Auto Mode | 44,7 | 14285 |
| Silence Mode | 38,7 | 11610 |
| Stage Mode | 49,1 | 14599 |
| Studio Mode | 40,6 | 13553 |

Note: noise measured @1m distance, static status, ambient 31 dBA.

| | | |
|-----------------------------------|---------------------|--------|
| Voltage / Power | 100-240V, 50-60HZ | 550W |
| Fixture Dimension / Weight | 364.9x210.6x631.6mm | 22Kg |
| Packing Dimension / Weight | 44.5x29.5x77cm | 30.5Kg |